

COMMITTED TO BUILDING GREEN

All standard Butler-Cote™ 25-year fluoropolymer color finishes feature high reflectivity with a Solar Reflectance Index (SRI) of 29 or greater.

ENHANCE AND PROTECT THE BEAUTY





The standard exterior paint finish for all Butler panels and trim is the Butler-Cote system, consisting of a full strength 70% Kynar 500® or Hylar 5000® PVDF resin-base fluoropolymer finish.

The Butler-Cote system resists the chalking and fading that often leaves a building looking drab

and dated. Our 25-year warranty guarantees that, on roof and wall panel standard colors, chalking will not exceed a rating of #8 and fading will not exceed 5ΔE color difference units. The warranty also covers blistering, peeling, cracks, or chipping of the paint finish.

While many manufacturers' warranties are prorated after a certain period of time, we offer our Butler-Cote roof and wall panel warranty for a full 25 years—with no prorating. It's a testament to our high performance standards.

FLUOROPOLYMER FINISH VS. SILICONE POLYESTER AFTER 8 YEARS OF WEATHERING.

	Butler-Cote™ Fluoropolymer Finish	Industry Standard Silicone Polyester Coating
Original Color		
Level of Chalking Allowable Within Warranty Terms		
Warranty Period	25 years	10 years

BUTLER-COTE™ FINISH SYSTEM SOLAR REFLECTANCE DATA

Available Standard "Cool" Colors	Initial Solar Reflectance	Initial Emittance	Solar Reflectance Index (SRI)	Color Number
Cool Solar White – MR-24®	0.70	0.86	85	451R836
Cool Solar White (other products)	0.75	0.87	92	451R838
Cool Igloo White	0.63	0.86	75	451R810
Cool Ivory White	0.63	0.86	75	451R809
Cool Shell Gray	0.54	0.87	63	452R1633
Cool Country Wheat	0.60	0.86	71	453R1160
Cool Desert Beige	0.50	0.87	57	453R1154
Cool Gray Stone	0.36	0.87	39	452R1583
Cool Marsh Green	0.30	0.86	30	455R1102
Cool Emerald Green	0.30	0.86	30	455R1198
Cool Palm Green	0.29	0.87	29	455R1101
Cool Ocean Blue	0.30	0.86	30	456R1384
Cool Majestic Blue	0.30	0.85	30	456RZ1385
Cool Brick Red	0.33	0.87	35	454R1016
Cool Harvest	0.34	0.87	36	457R1089
Cool Onyx Black	0.30	0.85	30	458R645
Galvalume® Plus	0.68	0.25	63	



BUILDING IN A NEW LIGHT®



Butler Manufacturing
Kansas City, MO
816-968-3000

Butler Buildings Canada
Burlington, ON, Canada
905-332-7786

www.butlrmfg.com

Butler® building products are constantly being improved; therefore, the information contained herein is subject to change without notice. Before finalizing project details, contact your nearest Butler Builder® or Butler Manufacturing™ for the latest information.
Kynar 500® is a registered trademark of Arkema. Hylar 5000® is a registered trademark of Solvay Solexis. Fluoropon® is a registered trademark of The Valspar Corporation. USGBC logo is a registered trademark owned by the U.S. Green Building Council and is used by permission. Energy Star is a registered trademark of the United States EPA.
©2010 BlueScope Buildings North America, Inc. All rights reserved. Butler Manufacturing™ is a division of BlueScope Buildings North America, Inc. Find your independent Butler Builder® at www.butlerbuilder.com.
Form No. 4828 10/10



BUTLER-COTE™ FINISH SYSTEM

Featuring a full palette of Fluoropon® colors each with an SRI of 29 or greater.



BUILDING IN A NEW LIGHT®

BUTLER-COTE™ FINISH SYSTEM


All exterior Butler-Cote™ fluoropolymer finishes have a Solar Reflectance Index of 29 or greater.




BUILDING IN A NEW LIGHT®

ROOF SYSTEMS


MR-24° AND CMR-24° ROOF SYSTEMS

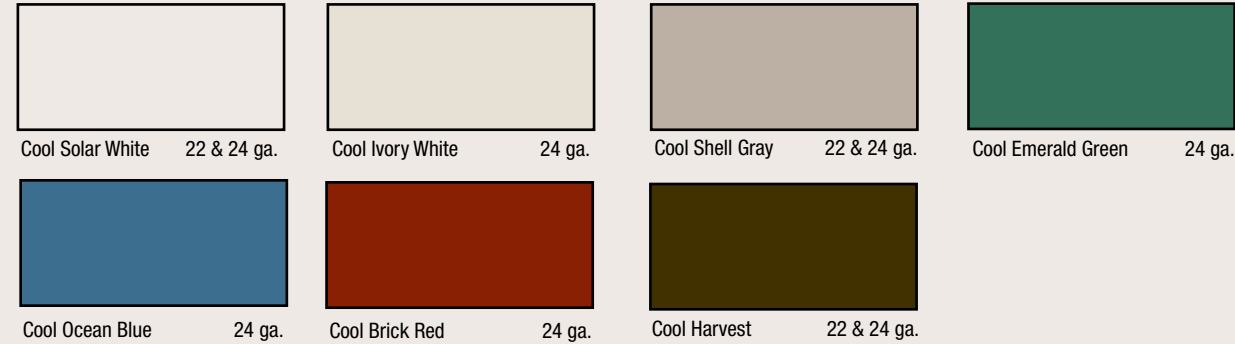


VSR II™ ROOF SYSTEM

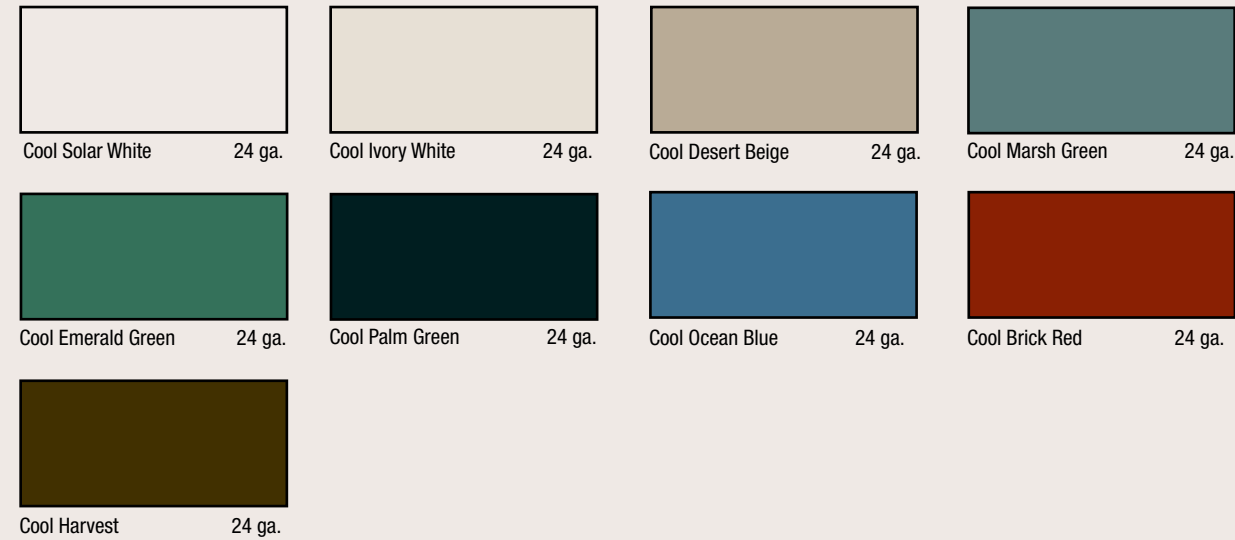


BUTLERIB® II ROOF SYSTEM

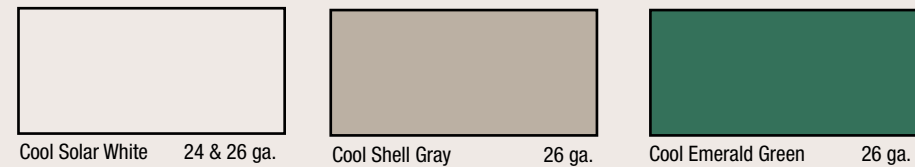

MODULEZE™ II SOFFIT COLORS



INTERIOR FINISH COLORS (NOT FORMULATED FOR EXTERIOR USE)

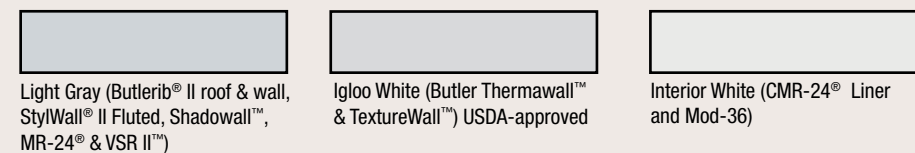

WALL SYSTEMS

SHADOWWALL™ AND BUTLERIB® II WALL SYSTEMS (GABLE TRIM*, EAVE TRIM*, GUTTER AND DOWNSPOUTS)




*All trims available in 26 gauge only

BUTLER THERMAWALL™ WALL SYSTEM



STYLWALL® II FLAT AND FLUTED WALL SYSTEM (FLAT 26 GA./FLUTED 24 GA.)

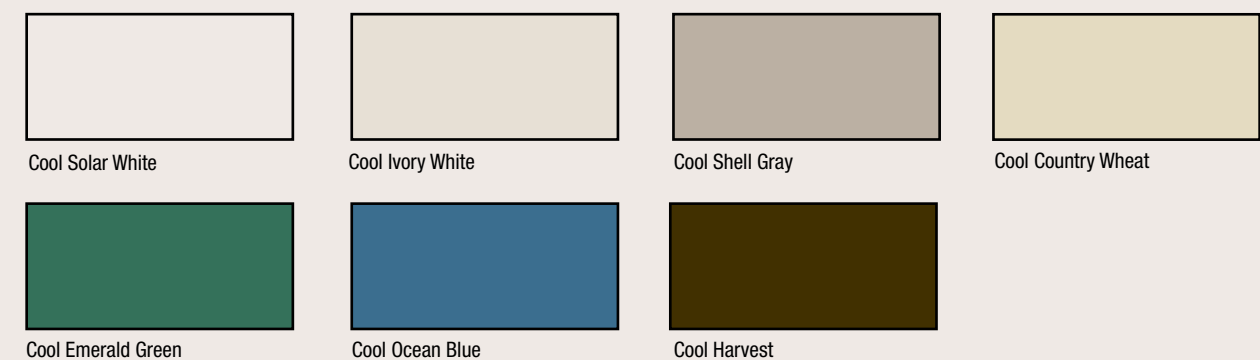

All color selections are close representations, but are limited by processing and viewing conditions.

See reverse side for Butler-Cote Solar Reflectance Index and performance data.

For color, gauges, or color/panel combinations not shown, additional charges apply and a minimum order is required.



BUILDING IN A NEW LIGHT®